



LEGEND III

Modificación para configuración 120 canales
 Modification pour configuration 120 canaux
 Modification for configuration 120 channels

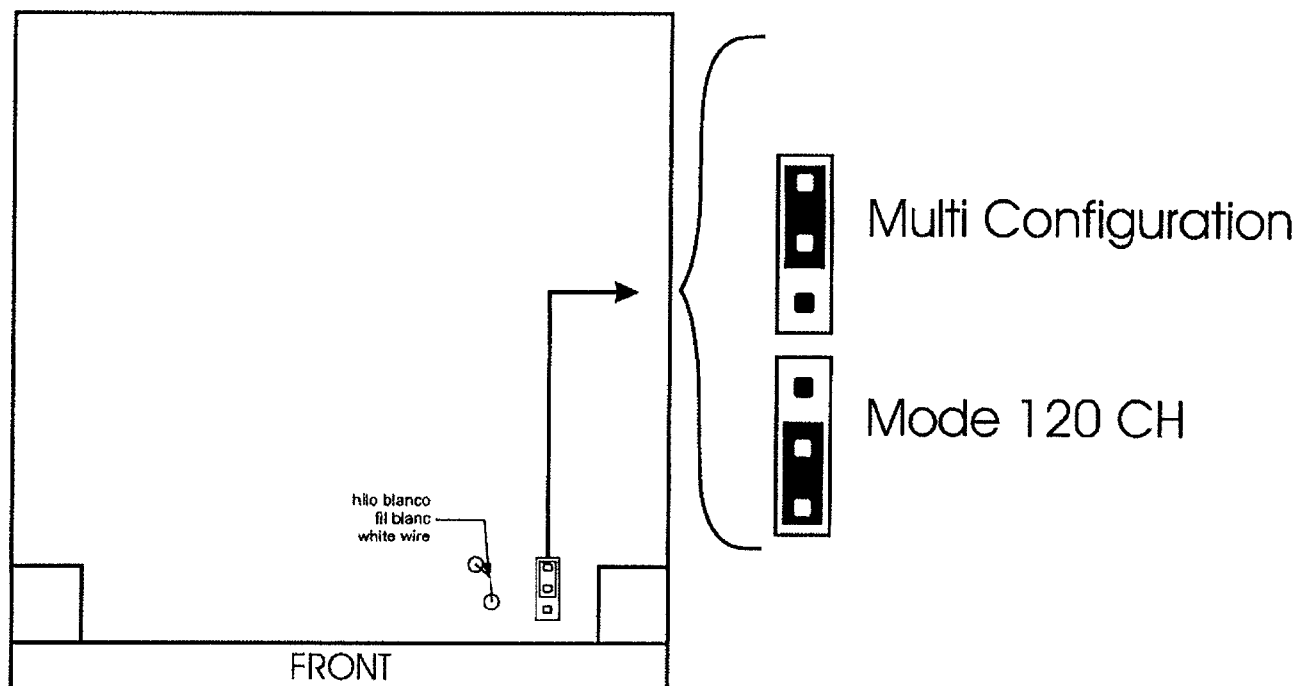


2 - cortar el hilo blanco - couper le fil blanc - cut the white wire


3 -




Configuración 120 canales
 Configuration 120 canaux
 Configuration 120 channels



Banda 40 Canales bajos
 Bande 40 cx inférieurs
 Band 40 cx inferior



Banda 40 Canales normales
 Bande 40 cx normale
 Band 40 cx normal



Banda 40 Canales altos
 Bande 40 cx supérieure
 Band 40 cx superior

El cambio de banda
 se hace por el
 botón «F»

Changement de
 bande par la
 touche «F»

Changing band
 with «F» key

*La señal acústica de
 cambio de canal, tiene
 una tonalidad diferente
 según la banda de
 frecuencia elegida.*

*Le beep sonore de
 changement de canaux a
 une tonalité différente
 selon la bande de
 fréquence choisie.*

*The audio beep for
 changing channels has a
 different tone according
 to the selected
 frequencies band.*

Channel-chart for president harry II modified to 120 channels

✓ A		✓ B.		✓ .C	
CB-Ch	MHz		MHz		MHz
1	26,965	1.	27,415	.1	26,515
2	26,975	2.	27,425	.2	26,525
3	26,985	3.	27,435	.3	26,535
4	27,005	4.	27,455	.4	26,555
5	27,015	5.	27,465	.5	26,565
6	27,025	6.	27,475	.6	26,575
7	27,035	7.	27,485	.7	26,585
8	27,055	8.	27,505	.8	26,605
9	27,065	9.	27,515	.9	26,615
10	27,075	10.	27,525	1.0	26,625
11	27,085	11.	27,535	1.1	26,635
12	27,105	12.	27,555	1.2	26,655
13	27,115	13.	27,565	1.3	26,665
14	27,125	14.	27,575	1.4	26,675
15	27,135	15.	27,585	1.5	26,685
16	27,155	16.	27,605	1.6	26,705
17	27,165	17.	27,615	1.7	26,715
18	27,175	18.	27,625	1.8	27,725
19	27,185	19.	27,635	1.9	26,735
20	27,205	20.	27,655	2.0	26,755
21	27,215	21.	27,665	2.1	26,765
22	27,225	22.	27,675	2.2	26,775
23	27,255	23.	27,705	2.3	26,805
24	27,235	24.	27,685	2.4	26,785
25	27,245	25.	27,695	2.5	26,795
26	27,265	26.	27,715	2.6	26,815
27	27,275	27.	27,725	2.7	26,825
28	27,285	28.	27,735	2.8	26,835
29	27,295	29.	27,745	2.9	26,845
30	27,305	30.	27,755	3.0	26,855
31	27,315	31.	27,765	3.1	26,865
32	27,325	32.	27,775	3.2	26,875
33	27,335	33.	27,785	3.3	26,885
34	27,345	34.	27,795	3.4	26,895
35	27,355	35.	27,805	3.5	26,905
36	27,365	36.	27,815	3.6	26,915
37	27,375	37.	27,825	3.7	26,925
38	27,385	38.	27,835	3.8	26,935
39	27,395	39.	27,845	3.9	26,945
40	27,405	40.	27,855	4.0	26,955